


Smooth and Rough Bore Metal

Federal's Flo-Master is an unpacked, torque resistant stripwound metal hose developed for superior sealability. It is similar in performance to a cotton packed hose but without the threat of burnt out packing.

Applications

- Exhaust Applications • Vacuum Systems
- Dry Bulk Conveying • Air Handling
- Rubber Hose Armor • Ducting Systems
- Exhaust for Heaters • Blower / Evacuators
- Elbows and Bends for Rigid Pipe Systems
- Conduit for Wires or Pipes

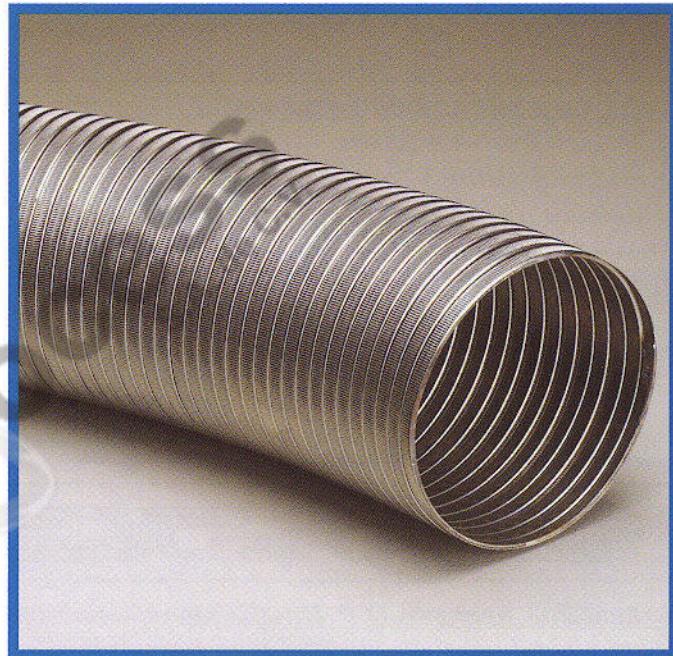

Temperature Range	-60°F to +2100°F
Standard Length	25' and 50'
Standard ID Size	1.50" to 16"
Material Available	Stainless Steel, Galvanized Steel

Flo-Master™

Type	Temp Range	Flexibility	Internal Abrasion Resist.	Extension / Compression
R360S*	-40° to +2100°	6	7	±8%
R360G*	-60° to +400°	6	5	±8%
SF400* Unpacked	-60° to +2100°	2.5	8	±1.5%

* Material Thickness - .018"

* Consult customer service for other options.

NOTES:

1. Flexibility 1 to 10. 10 is best - 1 is least.
2. Abrasion Resistance 1 to 10. 10 is best - 1 is least.

Temperature

GT Packing:	-20° to 180°F	(Pos 20 P.S.I.)
SIL Packing:	-65° to 500°F	(Pos 20 P.S.I.)

Packing Key

GT = Gas Tight
SIL = Silicone