


Turbocharger Hose

Turbocharger hoses are used to make connections to the engine air intake manifold, lubricating oil return path to engine crank case and sump.

These hoses are often mounted in inaccessible locations and provide highly durable and reliable connection. Also used for wastegate valve to the source of operating air. Can be supplied cut to length or in continuous reel format for cutting to length on the shop floor. Available in straight, shaped and stepped bore configurations.

Reinforced with meta-aramid fabric for excellent resistance to vibrational fatigue and are suitable for operation at temperatures up to +500F (+260C).

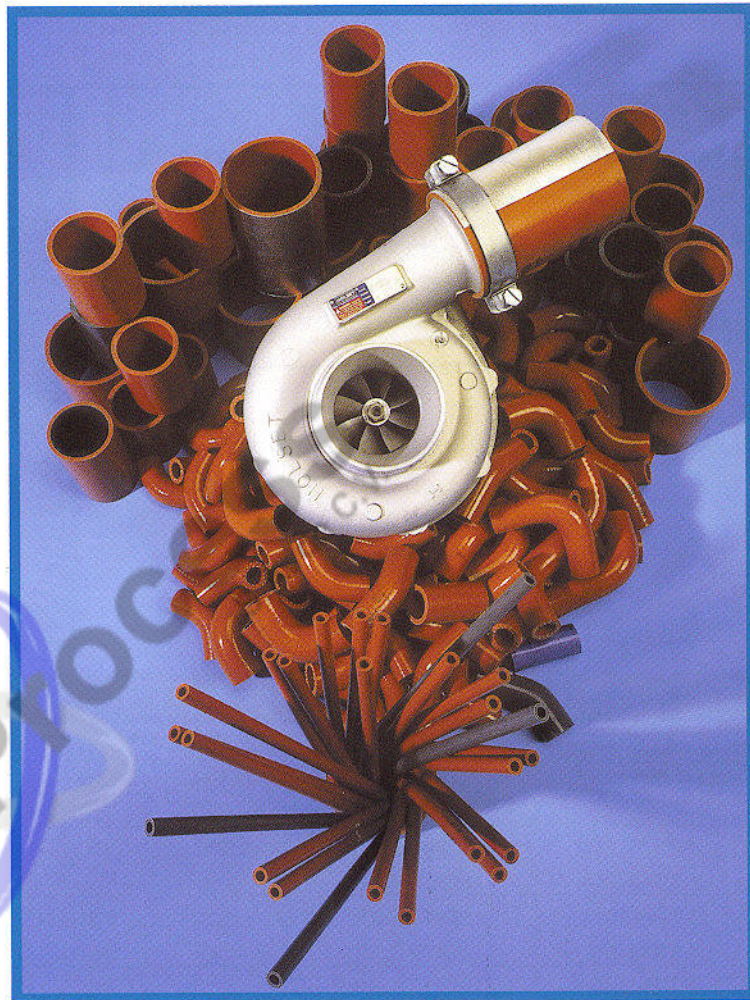

Turbo Charger Hose

Part #	I.D. (Inches)	Operating Pressure (PSIG)	Burst (PSIG)	Weight (Lb/ft)
7701-100	1.00	45	135	0.50
7701-125	1.25	40	125	0.55
7701-150	1.50	40	120	0.60
7701-200	2.00	35	105	0.70
7701-225	2.25	30	95	0.75
7701-250	2.50	30	90	0.80
7701-375	2.75	25	80	0.85
7701-300	3.00	25	75	0.90
7701-325	3.25	20	65	0.95
7701-350	3.50	20	60	1.00
7701-375	3.75	15	50	1.05
7701-400	4.00	15	45	1.10
7701-600	6.00	10	25	1.30