

HT2000/HT3000 Series Heavy Duty Interlocked & Convoluted "Flue-Saver" Chimney Liners



HT2000 Series Heavy Duty Stripwound Interlocked Chimney Liner

Stripwound interlocked construction provides a heavy duty flexible metal hose that offers flexibility, strength and long service life.

HT2000 Construction:

- A single metal strip is formed to create a flexible leak-proof interlocked metal hose that offers maximum flexibility, strength and resistance to corrosion, as well as superior service life.
- Standard is Type 304. Also available in Types 304L, 316, 316L and AL29-4-C stainless steel.




HT3000 Series Convoluted Chimney Liner

■ A single metal strip is corrugated and helically-wound to form a flexible gas-tight metal hose that offers flexibility, light weight and resistance to corrosion.

HT3000 Construction:

- Available in 2-ply aluminum and Types 316L and AL29-4-C stainless steel.

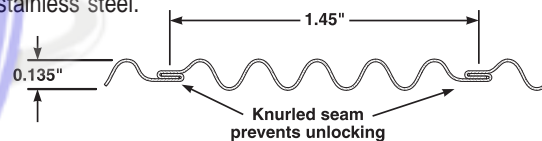

Features:

- Non-combustible . . . will not ignite or support combustion.
- Temperature, weather and Corrosion-resistant.
- Can be bent, straightened and re-bent.
- High crush-resistance.
- Good air-handling characteristics . . . low friction loss and minimal air leakage.
- Available in standard 25' lengths (extended). Cut lengths also available.
- Available ovalized, square or rectangular as an option . . . specify major and minor dimensions.

Applications:

- Chimney relining.
- Fume hood exhaust.
- Industrial and commercial dryer vents.
- Oven, kiln and calciner exhaust.
- Garage fume exhaust collection.
- Fresh air supply for air intake.
- Temporary spot air conditioning ducts.

Maximum Service Temperature:

Stainless Steel: Up to 1800°F Aluminum: 400°F

Catalog Series Numbers:

HT2000 Series heavy duty stripwound chimney liner:

HT2150S – Light-Medium Weight (.014" – .016" strip thickness) 304 SS
 HT2200S – Medium Weight (.018" – .020" strip thickness) 304 SS

HT3000 Series convoluted chimney liner:

HT3007S – Light-Weight (.006" – .007" strip thickness) 316L SS
 HT3008A – Light-Weight (.007" – .008" strip thickness) aluminum
 HT3006S – Light-Weight (.005" – .006" strip thickness) AL29-4-C SS

† Note: Consult factory for other metal alternatives and special length requirements.