


Pliovic® FG (FDA-3A)

APPLICATION:

A versatile, lightweight, reinforced tubing for the food and beverage, general air, multipurpose, pharmaceutical, and cosmetics industries; computer component manufacturers; textile mills; and air-actuated equipment.

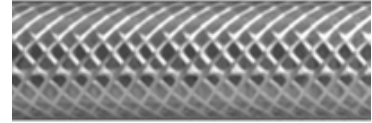

CONSTRUCTION

TUBE: Clear Pliovic™ compound, conforms to FDA, USDA, NSF-61 and 3-A standards

COVER: Clear Pliovic compound, conforms to FDA, USDA, NSF-61 and 3-A standards

REINFORCEMENT: Spiral synthetic yarn

TEMPERATURE: -10°F to 158°F (-23°C to 70°C)

PACKAGING: 1/4"-5/8" 300' Bagel Pack, one piece / 3/4" and 1" 200' Bagel Pack, one piece

BRANDING: Continuous brand "Goodyear™ Pliovic FG 3/8" ID (9.5 mm) 250 psi WP (1.7 Mpa). Made in USA."

COUPLINGS: Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

NON-STOCK/SIZES: Contact customer service for availability on cut, coiled, and tied hose lengths.

ORDER CODES: 540-337

ID		NOM. OD		MAX. WP		WEIGHT	
in.	mm.	in.	mm.	psi.	Mpa.	lb./ft.	kg./m.
1/4	6.4	0.44	11.2	250	1.72	0.05	0.07
5/16	7.9	0.50	12.7	250	1.72	0.07	0.10
3/8	9.5	0.59	15.0	250	1.72	0.08	0.12
1/2	12.7	0.75	19.1	200	1.38	0.12	0.18
5/8	15.9	0.87	22.1	200	1.38	0.15	0.22
3/4	19.1	1.02	25.9	150	1.03	0.19	0.28
1	25.4	1.34	34.0	125	0.86	0.31	0.46