

Abrasion Resistant

Clear Hose

Air Ducting

Dry

Exposed Helix

Low Temp.

# UREVAC-2

Medium duty Polyurethane-lined lightweight PVC material handling hose

## Features and Benefits

- **Polyurethane-lined HMW PVC construction** — provides excellent sub-zero flexibility.
- **Smooth abrasion-resistant polyurethane liner** — eliminates material build-up.
- **Black external PVC reinforcing helix** — provides high abrasion-resistance, increased flexibility and allows hose to slide easily . . . easier to handle.

## General Applications



- Grain clean-up wand hose.
- Rooftop cleaning wand hose.
- Insulation blowing.
- Lawn, leaf and mulch collection.
- Corrugated paper products scrap collection.

NOTE: Service life may vary depending on operating conditions and type of material being conveyed. Not for liquid handling use.

### Service Temperature Range

-40° F to 150° F

Actual service temperature range is application-dependent.

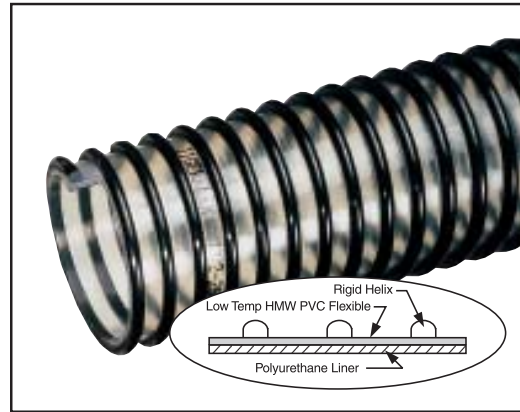

Series	Nominal				Approx. Liner Thickness (mm)	Working Pressure (PSI)		Vacuum Rating (In. Hg)		Min. Bending Radius @ 68°F	Standard Length (Ft)	Approx. Wt. (lbs/ft.)
	ID (In.)	ID (mm)	OD (In.)	OD (mm)		68°F	104°F	68°F	104°F			
UV2-150	1½	38.1	1.87	47.5	0.7	25	10	22	16	1.5"	60	.29
UV2-200	2	50.8	2.47	62.7	0.8	25	10	21	14	2.5"	60	.40
UV2-250	2½	63.5	2.96	75.2	1.0	20	8	19	12	3"	60	.53
UV2-300	3	76.2	3.54	89.8	1.1	20	8	18	11	4"	60	.67
UV2-400	4	101.6	4.57	116.1	1.1	15	7	13	9	6"	60	1.02
UV2-500	5	127.0	5.58	141.7	1.1	15	7	10	7	8"	60	1.22
UV2-600	6	152.4	6.62	168.1	1.1	10	5	7	5	10"	60	1.68
UV2-800	8	203.2	8.67	220.2	1.1	10	5	5	3	14"	20	2.24

Abrasion Resistant

Clear Hose

Static Dissipative

Dry

Exposed Helix

Low Temp.

# UREVAC-3

Heavy duty Polyurethane material transfer hose with embedded copper grounding wire

## Features & Benefits

- **Lightweight polyurethane construction** — provides good flexibility in sub-zero temperatures . . . ideal hose for intermediate material transfer application where a heavier hose will not work.
- **Black exposed helix design with embedded copper grounding wire** — provides high abrasion resistance and permits hose to slide more easily. Copper grounding wire allows for grounding hose in static conditions.
- **Smooth bore** — eliminates material build up.

## General Applications

- Grain clean-up wand hose
- Rooftop cleaning wand hose
- Insulation Blowing

Note: Service life may vary depending on operating conditions and type of material being conveyed.

### Service Temperature Range

-40° F to 150° F

Actual service temperature range is application-dependent.



TigerClamp™ Spiral Double Bolt Clamps available — see Page 29

Series	Nominal				Working Pressure (PSI)		Vacuum Rating (In. Hg)		Approx. Bending Radius @ 68°F	Standard Length (Ft)	Approx. Wt. (lbs/ft.)
	ID (In.)	ID (mm)	OD (In.)	OD (mm)	68°F	104°F	68°F	104°F			
UV3-300	3	76.2	3.60	91.4	40	20	Full	28	9"	100/50	.91
UV3-400	4	101.6	4.66	118.4	35	17	28	25	12"	100/50	1.50
UV3-500	5	127.0	5.50	145.0	35	17	28	25	14"	50/20	1.82
UV3-600	6	152.4	6.65	172.0	30	15	25	20	16"	50/20	2.24
UV3-800	8	203.5	8.76	223.0	30	15	25	20	18"	50/20	3.00

- Lawn, leaf, & mulch collection.
- Plastic pellet & powder transfer.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the metal wire is properly connected to ground, through the fitting or other means.

KTFCA0504