


ACUTECH POLYCARBONATE TUBING

Polycarbonate is a transparent material with high impact strength. It retains its rigidity and absorbs almost no moisture, making it ideal for electronic applications. Acutech stocks food grade polycarbonate, although UV stabilized, USP Class VI and gamma-resistant grades are available on a custom basis. Color matching also is available. Acutech's polycarbonate tubing meets ASTM standard D3935.

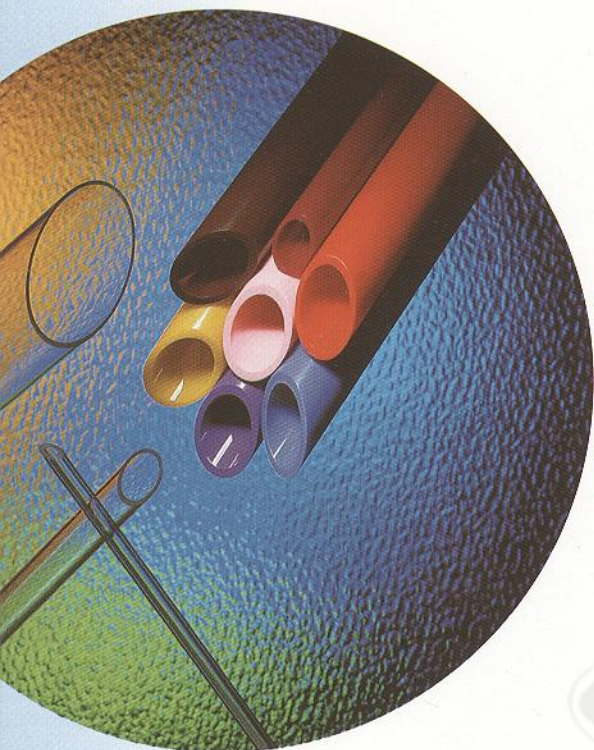

Acutech
Polycarbonate
Tubing

PRODUCT FEATURES

- High impact strength
- Transparent
- Excellent dielectric properties
- Low deformation under load
- Continuous service temperature 250°F
- FDA approved

TYPICAL APPLICATIONS

- Insulators
- Rollers
- Handles
- Medical devices
- Housing for components
- Food and beverage industry

Custom sizes and colors available

STOCK SIZES AVAILABLE FOR IMMEDIATE SHIPMENT

TUBING

O.D., inches	I.D., inches	Nominal Wall, inches
3/8	1/4	.062
1/2	3/8	.062
5/8	1/2	.062
3/4	5/8	.062
1	3/4	.125
1-1/8	1	.062
1-1/4	1	.125
1-1/2	1-1/4	.125
1-1/2	1-3/8	.062
1-3/4	1-1/2	.125
2	1-3/4	.125

TUBING

O.D., inches	I.D., inches	Nominal Wall, inches
2	1-7/8	.062
2-1/4	2-1/8	.062
2-1/4	2	.125
2-1/2	2-1/4	.125
2-3/4	2-1/2	.125
2-3/4	2-5/8	.062
3	2-3/4	.125
3-1/4	3	.125
3-1/2	3-1/4	.125

Stock sizes subject to change.

Standard length: 8 ft.

Stock sizes subject to change.