


RUBBER FAB

technologies group

RFSG

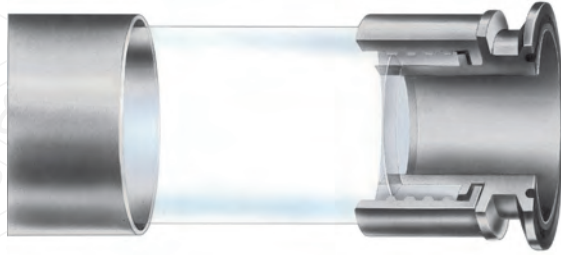

Non-Caged FEP Sight Gauge

TEMPERATURE: -25°F to 300°F

END CONNECTIONS: 316L stainless steel sanitary Tri-Clamp®
Consult factory for other end connection options

Part Number	Hose ID Inch	Hose OD Inch	Wall Thickness	Max. Working Pressure @ 70°F
08RFSG	0.50	0.70	0.10	150 psi
12RFSG	0.75	0.95	0.10	130 psi
16RFSG	1.00	1.25	0.12	125 psi
24RFSG	1.50	1.75	0.12	105 psi
32RFSG	2.00	2.25	0.12	72 psi
40RFSG	2.37	2.65	0.14	50 psi
48RFSG	2.87	3.23	0.18	40 psi
64RFSG	3.87	4.28	0.20	30 psi

Note:

ID is nominal bore only. Consult factory for fitting ID dimension.

Rubber Fab recommends a Rubber Fab factory crimp for this product.

Features

- Liquid level indicators
- Sturdy, favorable in high stress applications
- High and low temperature rated
- Smooth, non-stick surface cleans easily and promotes minimal pressure drop
- Non-contaminating
- Will not impart taste or odor
- Shatterproof tube
- Will not discolor
- Unaffected by ultraviolet or sunlight

Certifications

- 3-A Sanitary Standards
- USDA



26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com

Tel: +52 (55) 6273-4046 / 6273-4047 / 2465-1016