


RUBBER FAB

technologies group

Polysulfone End Caps

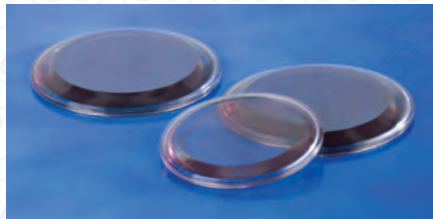

Size Inch	Part Number	A Dimension	B Dimension	C Dimension
1	16AMP-100-PS	1.98	1.23	0.35
1-1/2	16AMP-150-PS	1.98	1.23	0.35
2	16AMP-200-PS	2.52	1.76	0.35
2-1/2	16AMP-250-PS	3.05	2.29	0.35
3	16AMP-300-PS	3.58	2.80	0.35
4	16AMP-400-PS	4.68	3.92	0.35
6	16AMP-600-PS	6.57	5.03	0.60
8	16AMP-800-PS	8.57	7.20	0.50
10	16AMP-1000-PS	10.57	9.20	0.50
12	16AMP-1200-PS	12.57	11.20	0.50

Also available in Bevel Seat or I-Line styles.

Also available in Lexan.

26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com

Tel: +52 (55) 6273-4046 / 6273-4047 / 2465-1016