


# RUBBER FAB

technologies group

## RFSSHT

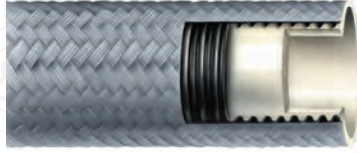

*PTFE Lined Stainless Steel Corrugated Hose*

**TUBE:** Seamless PTFE

**COVER:** Braided stainless steel

**TEMPERATURE:** -20°F to 350°F

Part Number	Hose ID Inch	Hose OD Inch	Bend Radius Inch	Max. Working Pressure @ 70°F psig	Vacuum Rating @ 70°F in. Hg.	Weight Per Foot Flanged Assembly	Weight Per Additional Foot
16RFSSHT	0.88	1.59	12	750	29	3.53	1.03
24RFSSHT	1.38	2.27	15	565	29	5.79	1.96
32RFSSHT	1.87	2.91	21	500	29	9.49	2.67
48RFSSHT	2.79	3.69	28	288	29	14.44	2.64
64RFSSHT*	3.76	4.84	46	250	20	21.57	3.17
96RFSSHT*	5.68	7.16	65	175	22	39.94	6.74
128RFSSHT*	7.71	9.31	89	212	20	62.50	9.50

\* Available in 150# flange style only.

### Features

- Smooth inner surface
- Bacteria free contact surface
- High purity
- Flare thru design eliminates metal corrosion and process contamination
- Available with optional 1/8" vent port

### Applications

- High and low temperature
- Chemical transfer
- Continuous steam
- Vibration absorber
- Load cell

### Hose Certifications

- Manufactured using FDA and 3-A compliant resin

### End Fittings

- PTFE Flare thru Tri-Clamp®
- PTFE Flare thru 150# flange

26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com

Tel: +52 (55) 6273-4046 / 6273-4047 / 2465-1016