


RUBBER FAB

technologies group

RFBSG

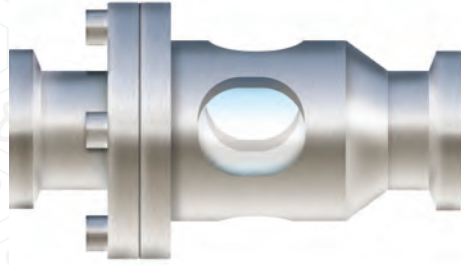

Bolted Sight Gauge

TEMPERATURE: Temperature rating for the borosilicate insert is dependent on temperature rating of gasket used in fitting connection. RFBSG comes standard with buna gasket and a temperature rating of 250°.

Borosilicate insert: 250°F

Acrylic insert: 180°F

Part Number	ID Inch	OAL Inch	# of Bolts	Max. Working Pressure @ 70°F Pyrex PSI	Max. Working Pressure @ 70°F Acrylic PSI
08RFBSG	0.50	3.00	4	378	1400
12RFBSG	0.75	3.00	4	325	450
16RFBSG	1.00	3.63	4	215	439
24RFBSG	1.50	3.63	4	150	306
32RFBSG	2.00	3.63	4	130	234
40RFBSG	2.50	3.63	6	100	160
48RFBSG	3.00	3.63	6	95	234
64RFBSG	4.00	3.63	8	60	n/a
96RFBSG	6.00	4.63	8	33	n/a

This product is factory fabricated.

Features

- Provides fast, continuous inspection from all angles
- Available with borosilicate or acrylic inserts
- Includes buna gasket. Also available with FKM fluoroelastomer and silicone
- Bevel Seat, Butt weld, I-Line, or Q-Line end configurations available

Certifications

- 3-A Sanitary Standards



26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com

Tel: +52 (55) 6273-4046 / 6273-4047 / 2465-1016